
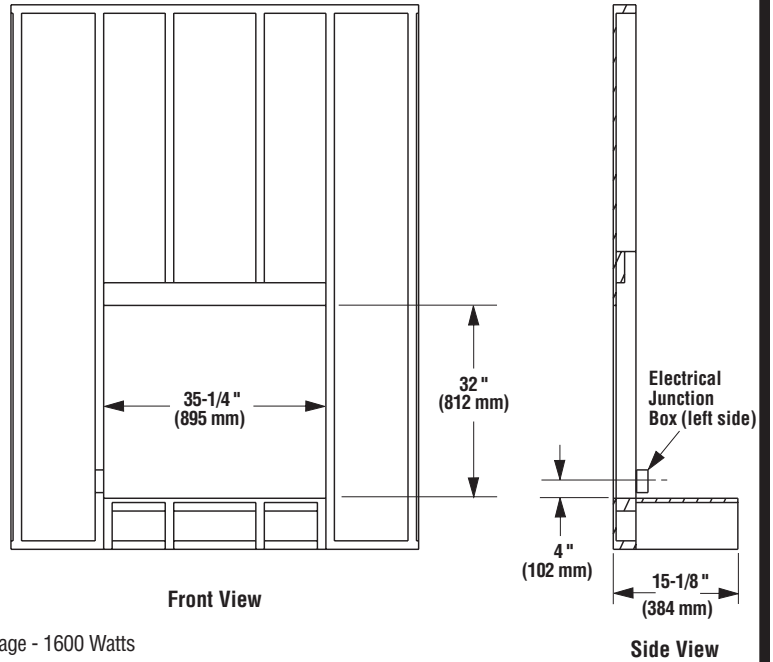


# MPE-33R

## MERIT® PLUS ELECTRIC FIREPLACE

Framing Dimensions

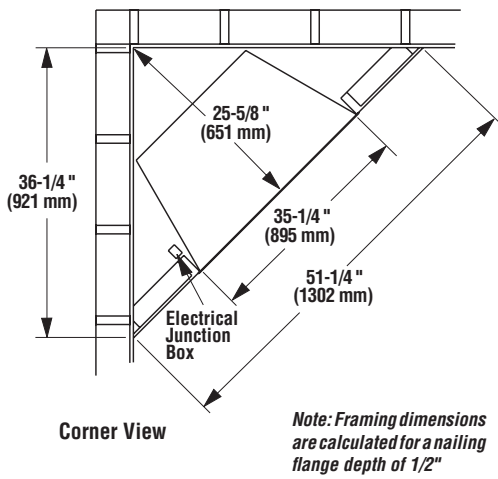


Product Reference Information



Cat. No. H3427  
 Model: MPE-33R  
 Description: Merit Plus Electric Fireplace,  
 33" Radiant  
 Shipping Weight: 81 lb.'s (36.75 KG)  
 Packaging:  
 41" x 17 3/4" x 33 1/2"  
 (1040 mm x 451 mm x 850 mm)  
 14.1 cu. ft.

Power Requirements:  
 (120 Volt, 60 Hz.)  
 Rated Wattage - 1600 Watts  
 Amperage - 13.33 Amps  
 (240 Volt, 60 Hz.)  
 Rated Wattage - 3000 Watts  
 Amperage - 12.5 Amps  
 Blower CFM: 83 CFM  
 (120 V): 5,461 BTU/HR  
 (240 V): 10,239 BTU/HR

Locations

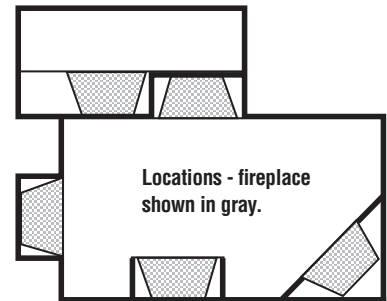



Fireplace Dimensions

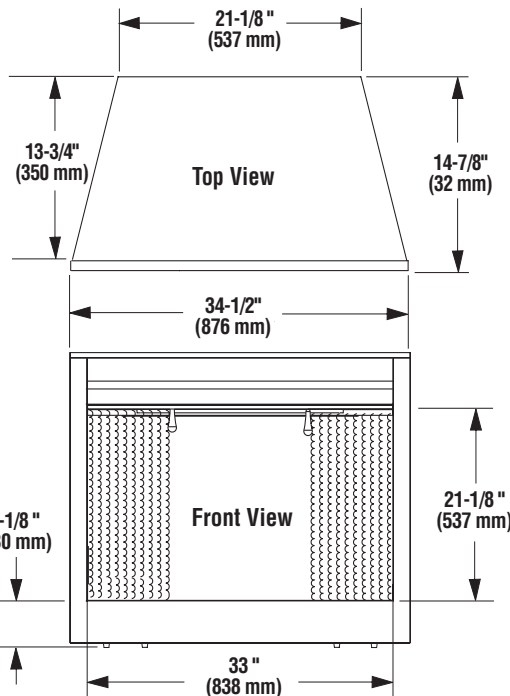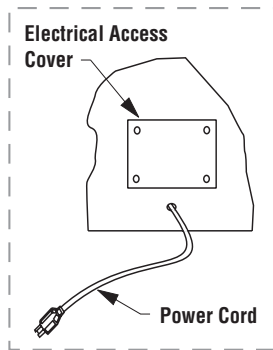

Listing



This appliance has been tested in accordance with UL 2021 and CSA C22.2 No. 46-M198 standards for fixed and location dedicated electric room heaters.

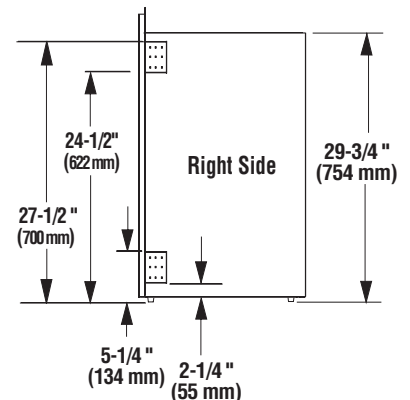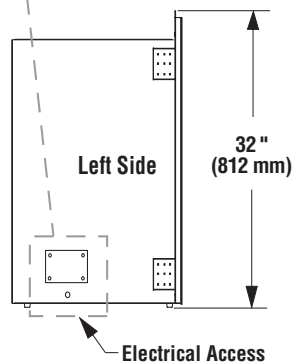

# MPE-33R

Clearances to Combustibles

**Clearances** - This appliance is an electric fireplace designed to be framed in with combustible materials (up to the edge of the appliance). A drywall lip at the top of the fireplace and 4 nailing flanges on the sides of the appliance is provided to facilitate installation.

Minimum Clearances Inches (millimeters)	
Back	0 (0)
Sides	0 (0)
Top	0 (0)
Floor	0 (0)

**Mantel Clearance:** Combustible and Non-combustible mantels may be installed at any height above the top of the face of fireplace.


**Hearth Protection:** A hearth is not required, but it is recommended for aesthetic purposes.

Fireplace Manual Controls

**Controls** - The Merit Plus Electric Fireplace is provided with an Infrared light Remote Control. All functions of the fireplace can be controlled through the remote control. Note: The Effective range of the remote control is up to approximately 26 feet (8 meters). Manual Controls are also provided on the appliance.

## Manual Control Panel

Main Power On/Off (rear most switch)




Heater On/Off (center switch)



Flame / Ember On/Off (front most switch)



Fireplace Features & Optional Accessories

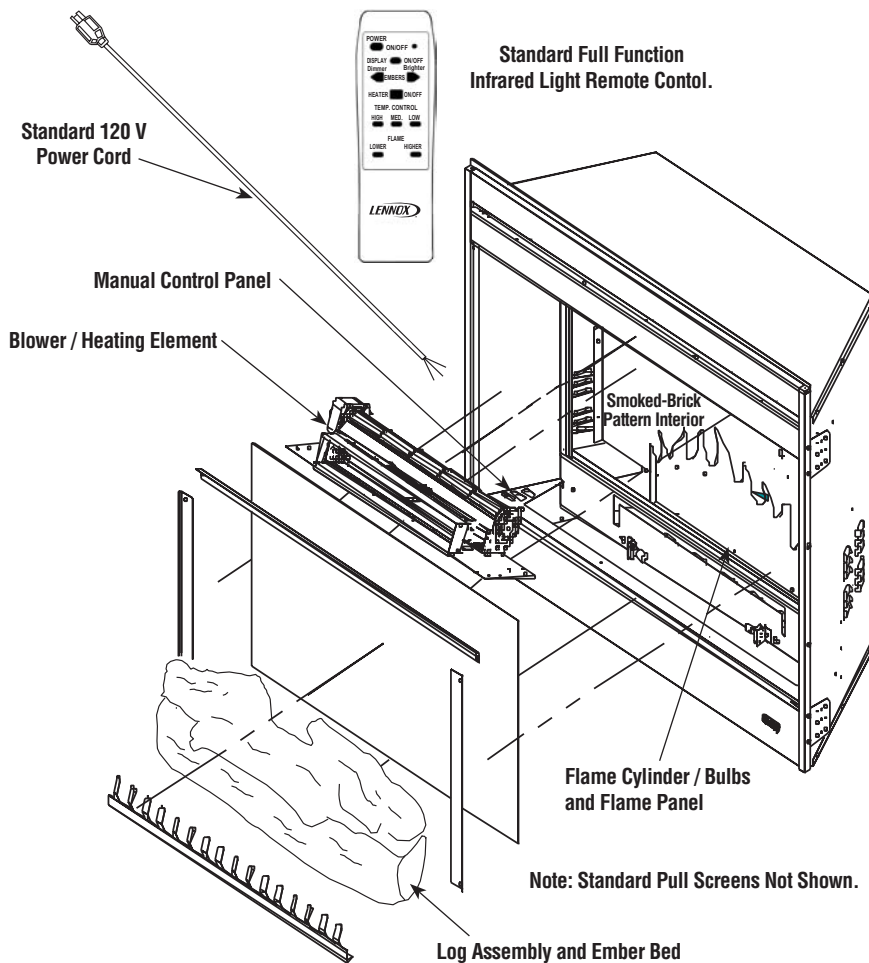

Standard Full Function  
Infrared Light Remote Control.

## Standard Features

- Oak log set and glowing ember bed.
- Smoked-Brick pattern interior.
- Adjustable flame height & ember intensity.
- Operable pull screens.
- 5000 BTU (120 V) or 10,000 BTU (240 V) heater.
- Full featured remote control.
- Wall switch and thermostat ready.
- 120 V Power Cord.

## Options

- Wall switch
- Wall thermostat
- Glass Enclosure Kits (black, brass & stainless)
- Trim Kits (black, brass & stainless on bronze)
- Complete Front Face Kits (mission style & interlocking arch)

Specifications and clearances are subject to change without notice. Refer to Installation Manual before installation of these appliances for updated dimensions and instructions.

Printed in U.S.A. © 2005 by LENNOX HEARTH PRODUCTS  
P/N 775,533M REV. A 06/2006

**LENNOX**  
HEARTH PRODUCTS

**MERIT® PLUS**  
ELECTRIC FIREPLACE